
Model RL MZ - painted black - Pantograph ladder system





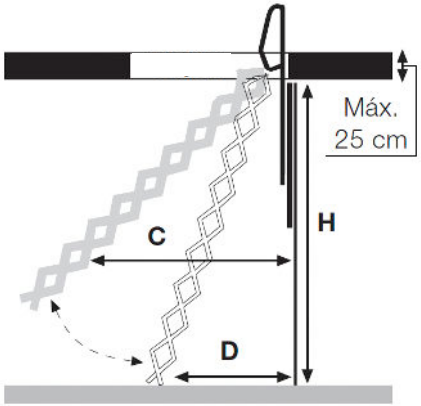

- H · Floor-to-ceiling height, excluding structural
- C · Maneuvering / clearance space
- D · Ladder base distance on the floor

Maximum admissible load: 150 kg
ISO 9001:2008 certified manufacturing

Technical characteristics

- → Box: Lacquered metal frame.
- → Box height: 14 cm.
- → Lid: 16 mm thick MDF wooden lid.
- → Closing system: Latch-type closure.
- → Structure: Lacquered tubular steel structure, coated by electrostatic painting process.
- → Tread width and going:
  - For openings 80×50 and 90×50: treads 26.5 × 9.9 cm, 3 cm thick.
  - For openings 100×60, 100×70, 120×60 and 120×90: treads 36 × 9.9 cm, 3 cm thick.
- → Tread surface: Non-slip tread.
- → Opening pole: Telescopic opening rod adjustable from 75 to 141 cm, included.
- → Exit handrail: Metal exit handrail for increased safety.
- → Finishing trim: Integrated metal trim.

Opening size A×B (cm)	External frame size (cm)	Floor-to-ceiling height H (cm)	Maneuvering space C (cm)	Ladder base distance D (cm)	No. of treads
80×50	79×49	225-250	134	123-104	9
		251-275	146	135-114	10
		276-300	158	148-120	11
90×50	89×49	225-250	134	123-104	9
		251-275	146	135-114	10
		276-300	158	148-120	11
100×60	99×59	225-250	134	123-104	9
		251-275	146	135-114	10
		276-300	158	148-120	11
100×70	99×69	225-250	134	123-104	9
		251-275	146	135-114	10
		276-300	158	148-120	11
120×60	119×59	225-250	134	123-104	9
		251-275	146	135-114	10
		276-300	158	148-120	11
120×90	119×89	276-300	158	148-120	11

Possibility of custom manufacturing: Width 50 to 90cm x Length 70 to 150cm / 300cm (H)

Possibility of adding up to 2 additional steps that each add up to 25cm.